



9500/F9500 Series Grade 1 Rim Device 9700/F9700 Series Grade 1 V/R Exit Device

ANSI GRADE 1
ANSI/BHMA A156.3-2001
Type 1 & Type 2
Exceeds 500,000 Cycles



UL Listed for "A" Label Doors
Rated Up to 3 Hours
UL10C Positive Pressure Rated
Conforms to UBC 7-2 (1997)
UL305 Listed for Panic Hardware
UL10B Neutral Pressure Rated



Comply with
ANSI117.1 for
Accessible and
Usable Buildings
and Facilities
Standards



NOA No. 15-0629.03 +/- 90 PSF
Florida Building Code: 20485



9570 Strike



9571 Shim



9500 Rim Device
US32D



9572 Top Strike



9573 Standard Bottom Strike



9700 V/R Rim Device
US32D

SPECIFICATIONS

CERTIFICATIONS

- ANSI Grade 1 approved, exceeds 500,000 cycles.
- UL305 Listed for Panic Hardware.
- UL Listed for up to 3hrs on "A" label Fire Doors.
- UL10B Neutral Pressure rated.
- UL10C/UBC7-2(1997) Positive Pressure rated.
- Comply with ANSI117.1 for accessible and usable Buildings and Facilities Standards.

DOOR FITTING

- 1-3/4" thick standard.
- 5-3/8" min. stile width required for single door at 5/8" stop.
- 4-7/8" min. stile width required for double doors, and V/R x Rim Device with overlapping strike (9285).
- Mounting Height – 41" from CL to finished floor.

DOOR WIDTH

- 36", rail can be cut from the end to fit door size down to 30".
- 48", rail can be cut from the end to fit door size down to 40".

DOOR HEIGHT

- 84" (7') - Standard with 36" Door width.
- 96" (8') - Standard with 48" Door width.
- 1' long Extension Rod available. (ETR12)

STRUCTURE


- Head Cover – Plated Zinc Alloy.
- Chassis – Steel or Stainless Steel.
- End Cap – Plated Zinc Alloy.
- Rail Assembly – Heavy Gauge Extruded Aluminum.

LATCH BOLT

- Rim – Stainless Steel, 3/4" throw.
Automatic dead-latching by pressing down the Guard Bolt.
- V/R – Top: Stainless Steel, 19/32" throw.
Bottom: Stainless Steel, 39/64" throw.

Mount with Outside Trim

Standard Backset 2-3/4" Stop 5/8"

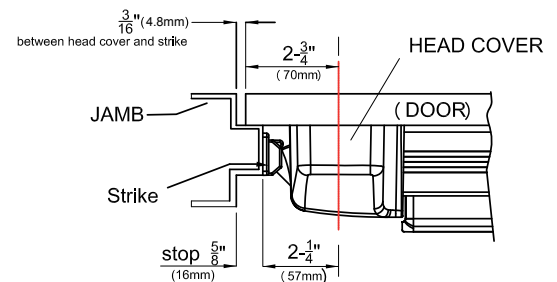

9500/F9500 Series Grade 1 Rim Device 9700/F9700 Series Grade 1 V/R Exit Device



25-Year Warranty

SPECIFICATIONS

STRIKE

- Rim – Solid Stainless Steel (9570). 1/8" Thick Steel Shim (9571) included for 1/2" Door Stop. Overlapping Strike (9585) for use on Rim Device with Surface Vertical Rod for Double Door.
- V/R – Top: Stainless Steel with roller. (9572)
Bottom: Stainless Steel with roller. (9573) Alternative Bottom Strike – 9574 & 9575.



FASTENERS

- Furnished with wood & Machine screw.
- Thru-Bolts for F9500/F9700. (1346/1310)

FINISH

- US32D on Head Cover, Touch Bar, End Cap, and Latch Cases.
- US19 (622) Matte Black, Mounting Rail is aluminum anodized US26D).
- Special order for US26 (625) Polish Chrome.



HANDING

- Rim – Reversible non-handed.
- V/R – Standard with RHR or LHR, easily field reversible.

DOGGING

- Standard for 9500/9700 only, Cylinder Dogging optional (with Dogging Kit – 9CD36 or 9CD48).


ALARM

- Alarm Kit available, Item code – 9AK36 or 9AK48.

DIMENSIONS

Projection: 3-17/64" maximum, 2-17/32" dogged.

Overall Size: 8-5/64" Height x Width 33-5/32" or 45-5/32".

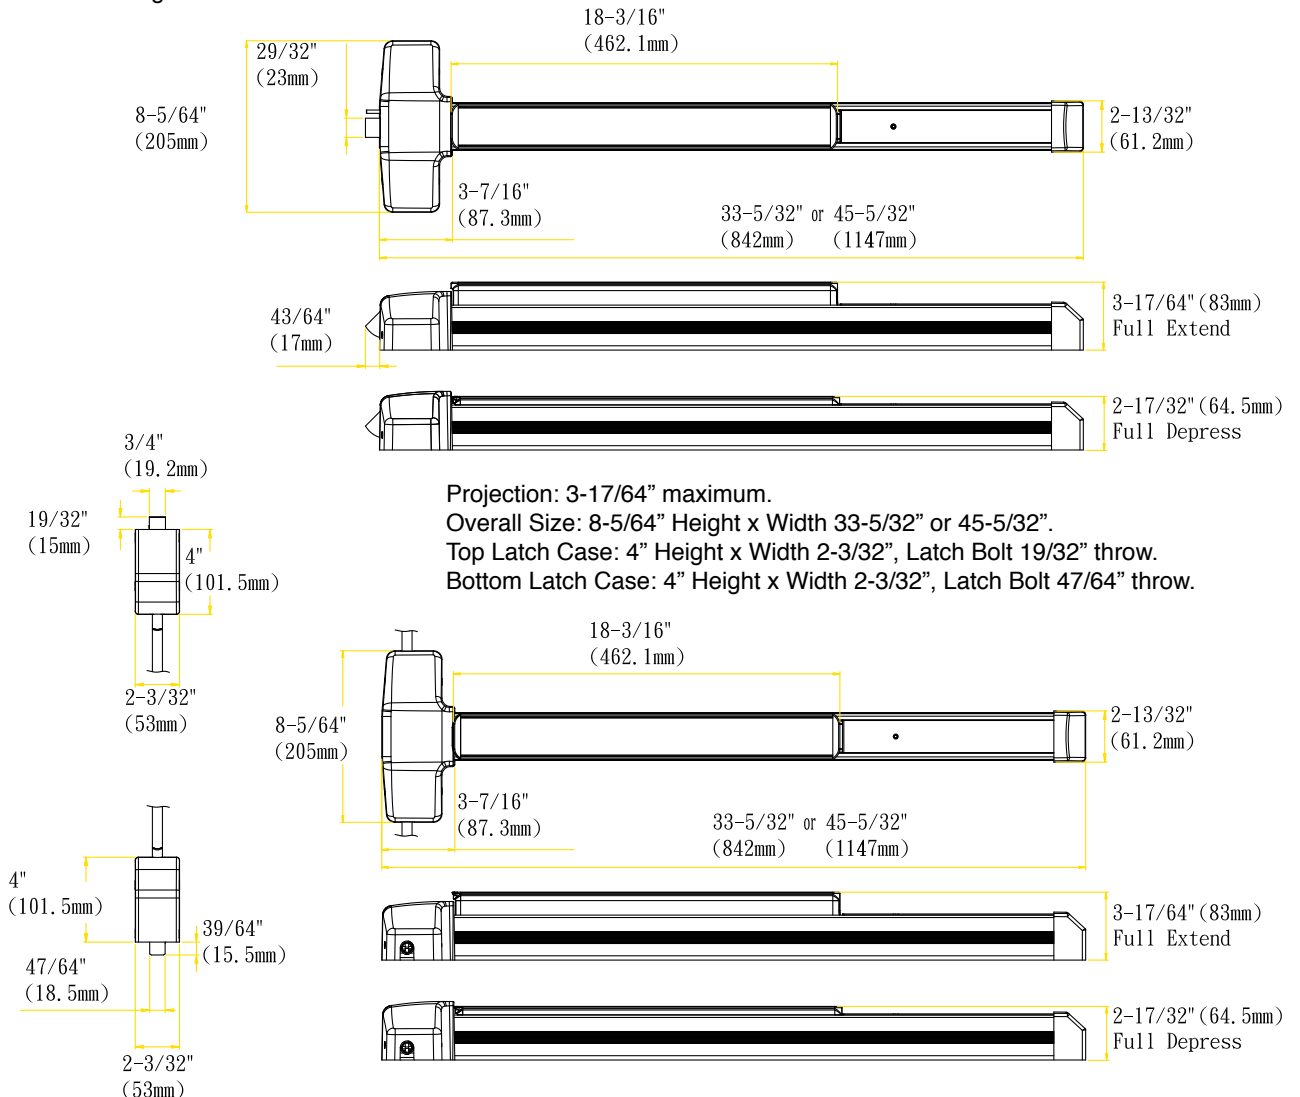










9500/F9500 Series Grade 1 Rim Device 9700/F9700 Series Grade 1 V/R Exit Device









OUTSIDE TRIMS

<p>900L Heavy Duty Lever Trim Finish: US26D, US19 Functions(ANSI): 900L Entrance(08) 901L Passage(14) 904L Storeroom(09) 915L Dummy(02)</p> 	<p>900ETL Heavy Duty Escutcheon Lever Trim Finish: US32D, US19 Functions(ANSI): 900ETL Entrance(08) 901ETL Passage(14) 904ETL Storeroom(09) 915ETL Dummy(02)</p> 	<p>400TP Thumbpiece Trim Finish: US32D Functions(ANSI): 400TP Entrance(05) 401TP Passage(15) 404TP Night Latch(06) 415TP Dummy(02)</p> 	<p>611PT Pull Trim Finish: US32D Functions(ANSI): 611PT Night Latch(03) 615PT Dummy(02) 630PT Cover Plate</p> <p>90° Offset Door Pull 1" Dia. S1010 - 10" CTC S1012 - 12" CTC Dummy(02)</p> 
--	---	--	---

STRIKES & FILLERS

<p>Surface Strike and Shim For 9500/F9500</p>  <p>9570 9571 Shim, 1/8" thick</p>	<p>V/R Top Strike</p>  <p>SVRTS72</p>	<p>V/R Bottom Strike</p>  <p>SVRBS73</p>	<p>Alternative Bottom Strike</p>  <p>SVRABS74 SVRCBS75</p>
<p>Filler</p>  <p>9222 Latch front filler 1-1/8" x 2-1/4"</p>	<p>Filler</p>  <p>9209 ASA strike filler 1-1/4" x 4-7/8"</p>	<p>Overlapping Strike with Shim</p>  <p>9585</p> <p>Used for double door on inactive door to receive latch on active door. 1/8" shim included</p>	

ACCESSORIES

<p>Thru-Bolt For Door 1-3/4" ~ 2" 1346 – for 9500/F9500(6pcs) 1310 – for 9700/F9700(10pcs) For Door 2" ~ 2-1/4" 2146 – for 9500/F5700(6pcs) 2110 – for 9700/F9700(10pcs) Finish: US32</p> 	<p>Ext. Rod ETR12 – 1' extension</p> <p>* For extend the Top Rod only</p> 	<p>Dogging Key</p>  <p>9201-29</p>	<p>Cylinder Dogging Kit</p>  <p>9CD36 – for Exit Device 36" 9CD48 – for Exit Device 48"</p>
<p>Thru-Bolt Jig For 900L Vertical Thru-Bolt Backset 2-3/4", CTC 2-3/4"</p>  <p>9234</p>	<p>Glass Bead Shim Kits For 9500/F9500</p>  <p>9501</p>	<p>Glass Bead Shim Kits For 9700/F9700</p>  <p>9706</p>	<p>Alarm Kit (with decal)</p>  <p>9AK36 – for door width 36" 9AK48 – for door width 48"</p>